

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 February 2005 (03.02.2005)

PCT

(10) International Publication Number
WO 2005/009634 A1

(51) International Patent Classification⁷: **B08B 7/02**, 1/04,
B21B 45/04, B21C 43/00

(21) International Application Number:
PCT/NO2004/000220

(22) International Filing Date: 19 July 2004 (19.07.2004)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
20033365 28 July 2003 (28.07.2003) NO

(71) Applicant (for all designated States except US): **DAL-
SEIDE & CO.** [NO/NO]; N-5397 Bekkjærviik (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DALSEIDE, Bjørn,
Ove** [NO/NO]; N-5397 Bekkjærviik (NO).

(74) Agent: **AS BERGEN PATENTKONTOR**; Strandgaten
198, P.O. Box 1998, Nordnes, N-5817 Bergen (NO).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

[Continued on next page]

(54) Title: DEVICE OF A DESCALER HEAD

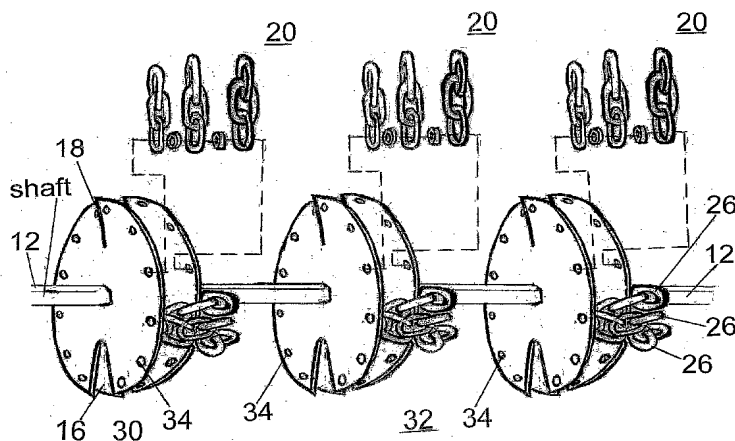

(57) **Abstract:** A device of a descaler head is described with circumferentially following and longitudinally following rows of descaler parts (22, 24, 26) where the descaler head comprises: a shaft (12) onto which are fed a number of holding elements for the descaler parts (22, 24, 26), said holding bodies are held together in axial direction with the help of adjustable gripping appliances on the carrier shaft, and each descaler part is connected to associated holding bodies via connecting means that are each in the form of a relatively short length of chain, piece of wire or similar flexible connecting means, at a distance from the rotational axis of the descaler head. The descaler head is characterised in that each holding body is formed by two mutually separated disc-shaped elements (30, 32), with the descaler elements (22, 24, 26) being arranged held in between the plate elements of the holding body with mutual distance along their periphery, with each holding body (30, 32) being shaped with means to prevent mutual twisting in relation to the adjoining holding bodies.

WO 2005/009634 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.